

Point discharge current measurements beneath dust devils

Article

Accepted Version

Creative Commons: Attribution-Noncommercial-No Derivative Works 4.0

Lorenz, R. D., Neakrase, L. D. V., Anderson, J. P., Harrison, R. G. and Nicoll, K. A. (2016) Point discharge current measurements beneath dust devils. *Journal of Atmospheric and Solar-Terrestrial Physics*, 150-151. pp. 55-60. ISSN 1364-6826 doi: <https://doi.org/10.1016/j.jastp.2016.10.017> Available at <https://centaur.reading.ac.uk/67963/>

It is advisable to refer to the publisher's version if you intend to cite from the work. See [Guidance on citing](#).

To link to this article DOI: <http://dx.doi.org/10.1016/j.jastp.2016.10.017>

Publisher: Elsevier

All outputs in CentAUR are protected by Intellectual Property Rights law, including copyright law. Copyright and IPR is retained by the creators or other copyright holders. Terms and conditions for use of this material are defined in the [End User Agreement](#).

www.reading.ac.uk/centaur

CentAUR

Central Archive at the University of Reading

Reading's research outputs online

Point Discharge Current Measurements beneath Dust Devils

Ralph D. Lorenz*

Johns Hopkins University Applied Physics Laboratory, 11100 Johns Hopkins Road,
Laurel, MD 20723, USA.

Lynn D. V. Neakrase

Department of Astronomy, New Mexico State University, Las Cruces, NM, USA

John P. Anderson

Jornada Experimental Range Headquarters, New Mexico State University, Las Cruces, NM, USA

R. Giles Harrison, Keri A. Nicoll

Department of Meteorology, University of Reading, UK

*Corresponding Author. Tel. +1 443 778 2903 Fax. +1 443 778 8939 Email: Ralph.lorenz@jhuapl.edu

Submitted to Journal of Atmospheric and Solar-Terrestrial Physics, August 5, 2016

Assigned MS ATP-S-16-00311. Revised Version, October 26, 2016

17

18 Abstract

19 We document for the first time observations of point discharge currents under dust devils using a novel
20 compact sensor deployed in summer 2016 at the USDA-ARS Jornada Experimental Range in New
21 Mexico, USA. A consistent signature is noted in about a dozen events seen over 40 days, with a positive
22 current ramping up towards closest approach, switching to a decaying negative current as the devil
23 recedes. The currents, induced on a small wire about 10cm above the ground, correlate with dust devil
24 intensity (pressure drop) and dust loading, and reached several hundred picoAmps.

25

26 Keywords : Dust Devils ; Meteorology ; Atmospheric Electricity

27

28

1. Introduction

Dust devils are an important agent of dust-raising on Earth and Mars (Balme and Greeley, 2006). On Mars, they are among the most prominent meteorological features, whereas on Earth they are mostly a curiosity but sometimes cause damage or, very occasionally, fatalities (Lorenz et al., 2016). Triboelectric processes typically lead to charging of the lofted dust (Harrison et al., 2016), and even from the earliest days of systematic studies of dust devils, their electrical properties have been of interest. A notable example in the early work is that of Colonel Baddeley of the British Army, who in the 1860s, carried a gold-leaf electroscope into dust devils in India (e.g. Baddeley, 1860; Lorenz et al., 2016).

Interest in the electrical properties of dust devils at Mars has been stimulated by the notion that tribochemistry and/or electrical discharges may influence atmospheric chemistry, via the production of oxidants which may play a role in the destruction of organics and/or methane (e.g. Atreya et al., 2006; Delory et al., 2006; Kok and Renno, 2009). In fact early investigators such as Baddeley and others also studied the presence of ozone in terrestrial dust devils (Lorenz et al., 2016), hence understanding the electrical and chemical aspects of dust devils can be appreciated as of enduring importance. The recently-launched European Space Agency (ESA) ExoMars Schiaparelli lander brings new interest in dust devil electrification, in that its DREAMS meteorology package (Dust Characterisation, Risk Assessment, and Environment Analyser on the Martian Surface, Esposito et al., 2014) includes an electric field sensor, with the prospect of providing Mars data to compare with conceptual (e.g. Farrell et al., 2003) and numerical (e.g. Barth et al., 2016) models.

2. Site and Instrumentation

Observations were made between 4 May and 14 June 2016 at the Jornada Experimental Range (783 km²), 37 km north of Las Cruces, NM. This US Department of Agriculture facility on the Jornada del Muerto Plain lies between the Rio Grande floodplain (elevation 1,186 m) on the west and the crest of the San Andres Mountains (2,833 m) on the east. Just beyond the San Andres Mountains are the dunes of White Sands National Monument, and the nearby missile range, which was the site of a previous visual dust devil survey (Snow and McLelland, 1990). In fact, the Jornada del Muerto itself was the site of measurements of dust devil electric fields made a half century ago (Crozier, 1970).

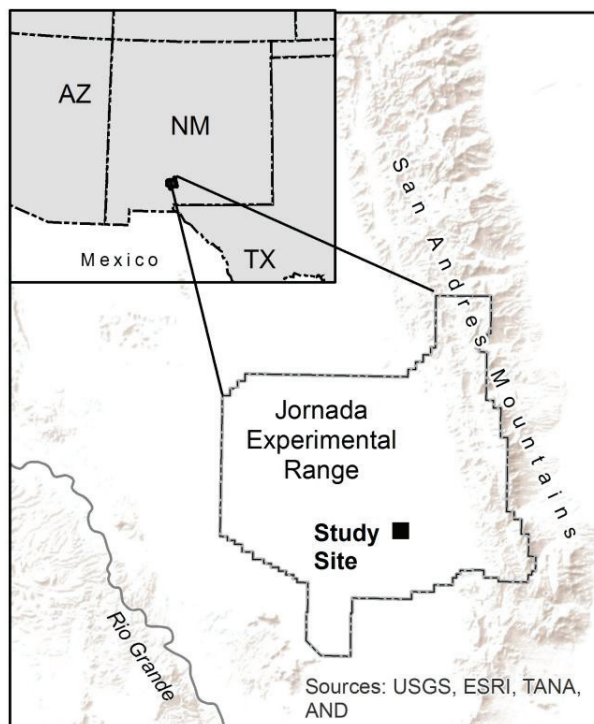


Figure 1. Study Site Location

The climate of Jornada is characteristic of the northern region of the Chihuahuan Desert with abundant sunshine, low relative humidity, wide diurnal temperature ranges (average maxima are 36°C in June),


and variable precipitation both temporally and spatially. Potential evaporation is approximately 10 times the average precipitation, which is $\sim 241 \text{ mm yr}^{-1}$ and occurs as localized thunderstorms during July, August, and September. The site (106.69016°W , 32.58752°N) has variable cover of grasses and low scrub (figure 2).



Figure 2. Aerial view of the field site, taken with a GOPRO digital camera lofted on a parafoil kite (the kite string is visible just left of center). The area is flat, with partial cover of scrub land bushes. The loggers were deployed just to the lower right of the square fence that protects an unrelated meteorological installation. A vehicle and research personnel are visible for scale.

Following previous successful deployments (Lorenz et al., 2015; Lorenz, 2016) at Jornada, we use Gulf Coast Data Concepts B1100 pressure loggers, which monitor a precision Bosch BMP085 pressure sensor (recorded with a resolution of 1 Pa, or 0.01 mbar) with a microcontroller that logs the pressure data and housekeeping temperature as ASCII files on a 2 GB microSD flash memory card. The whole unit operates

84 as, and its form factor resembles, a large USB memory stick, facilitating data transfer to a PC. As
 85 described in Lorenz (2012), for this application the nominal single AA battery is replaced by a pair of
 86 alkaline D-cells (figure 3), allowing unattended multi-month operation at sample rates of 2Hz or more.
 87 The sensor and battery are installed in a plastic case, drilled to allow pressure equalization. An
 88 augmentation to the standard B1100 that was made available to us by the manufacturer (see e.g. Lorenz
 89 and Jackson, 2015) is the option to record an additional analog voltage (in the range 0 to 4.19 V) with
 90 12 bit resolution at an interval of 1 s.

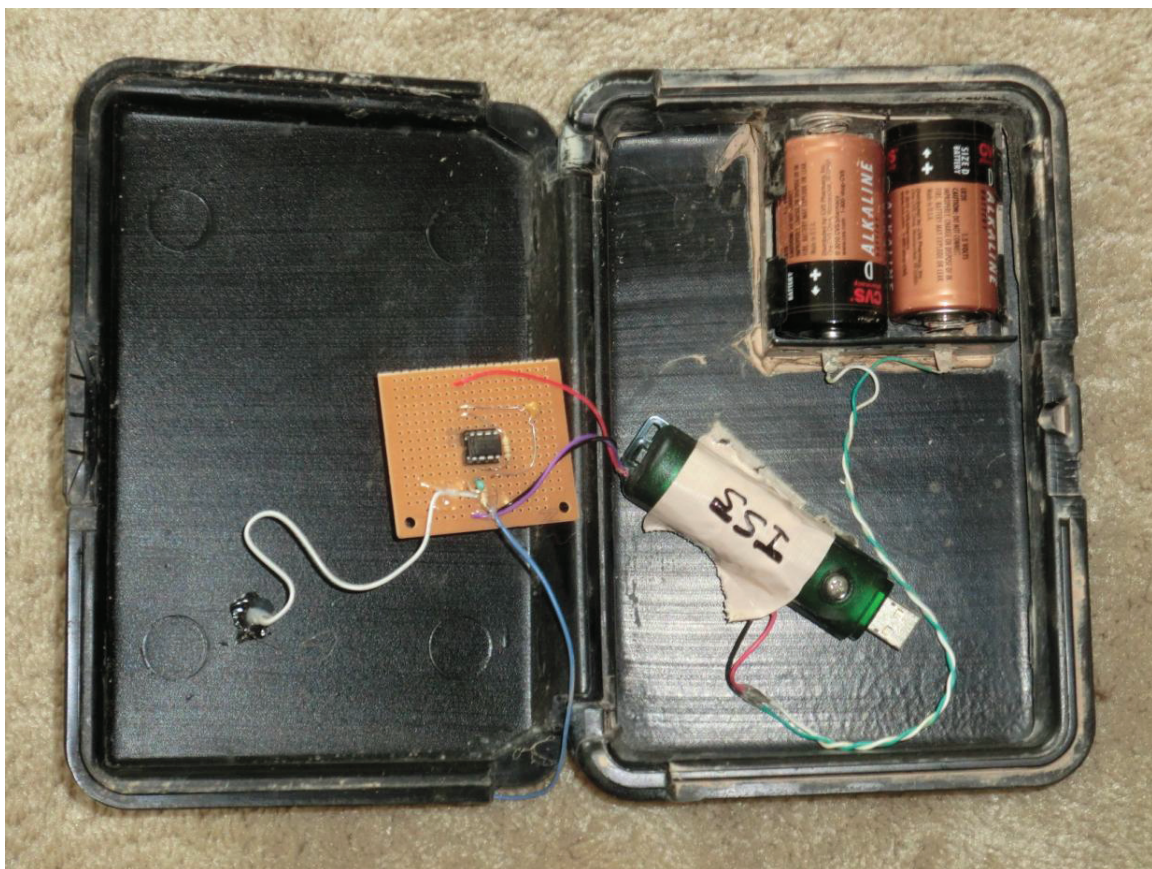

91
 92 Figure 3. The instrumentation package comprises a datalogger (a large USB datastick) at lower right,
 93 powered by two alkaline D-cells at upper right. An analog logging channel is wired to the point discharge
 94 current sensor on the circuit board at left, which is grounded to a wire mesh (not shown). The white
 95 wire at left is the input discharge wire.

96

97

98

99


100 For four loggers, this measurement channel was wired to a point discharge current sensor, using a
101 simple copper wire as a current collection antenna. Low voltage operation was required, since the
102 logger provided only 3.3V regulated power, and low current consumption was desired to permit long
103 duration operation. Further, low input bias current circuitry was required for this measurement: we
104 therefore selected the MAXIM MAX-407 electrometer-specification operational amplifier (<0.1 pA bias).
105 For this application, an aluminium mesh was attached to the case for grounding and screening, and to
106 limit surface charging (figure 3). The current-collecting electrode was a simple PVC-insulated tinned
107 copper wire projected vertically, further isolated from the case by a Teflon sleeve. About 7mm of tinned
108 conductor was exposed, 7cm above the upper surface of the case and thus 10cm above the ground
109 (figure 4). The unit was simply placed on the soil.



Figure 4. The logger as it was deployed in the field. The sensing wire projects $\sim 7\text{cm}$ up from the wire mesh through an insulating Teflon sleeve (here hidden by some stiffening tape)

Because there may be a wide dynamic range of currents to measure, (e.g. Marlton et al., 2013 show point discharge currents from fA up to μA , depending on electrified cloud activity) two units (I51, I54) were configured (figure 5) as a logarithmic current amplifier inspired by the point discharge sensor design of Marlton et al. (2013). We used a pair of back-to-back near-infrared LEDs as the feedback element in this instance. Although previous applications favoured green LEDs as having a stronger response (Marlton et al., 2013; Acharaya and Aggarwal, 1996), their forward voltage drop was too high for the present low-voltage operation, and so 940nm near-IR LEDs, with a smaller bandgap ($\sim 1.3\text{V}$) were needed. Although ‘air-wiring’ the electrode to the op-amp is necessary for ultra-low current

123 measurements, this is much less necessary for the typical currents found in atmospheric point discharge
 124 (Marlton et al, 2013) and mechanical robustness for field deployment becomes the paramount
 125 consideration; the electrode wire was therefore simply soldered to the circuit board conventionally. For
 126 simplicity the temperature compensation circuits of Marlton et al. (2013) were not implemented.

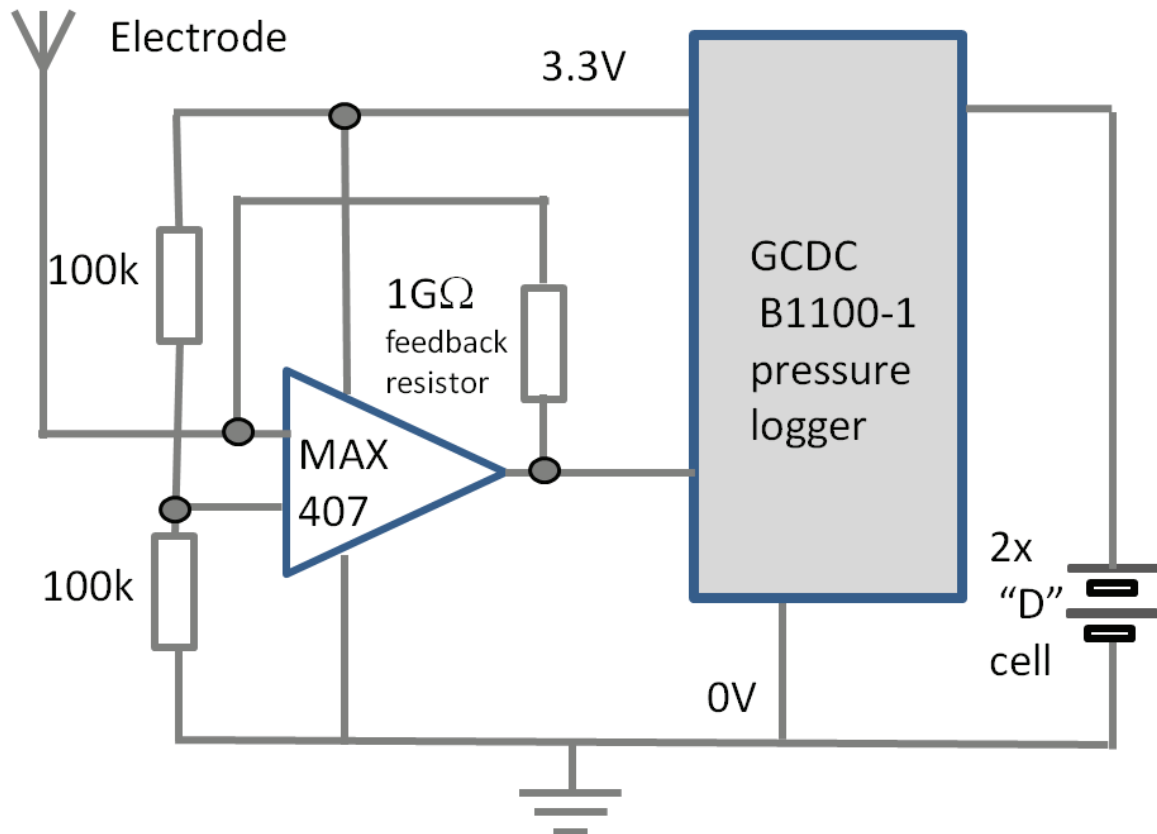

127
 128 Figure 5. Schematic diagram of the point discharge sensor current amplifier and pressure sensor logger
 129 setup. In this instance, the feedback component is a 1 GΩ resistor. In two other units this was replaced
 130 by a pair of LEDs. A 100nF decoupling capacitor (which is connected between across the op-amp
 131 supply rails) is not shown.

132
 133 In addition, two units were configured as simple current amplifiers, one (a low sensitivity device) with a
 134 10 MΩ feedback resistor (giving a ~150nA full-scale reading for the ~1.5V voltage swing permitted by the
 135 sensor power supply) and another (a high sensitivity device) with a 1 GΩ resistor, giving a 1500 pA full-

scale reading and a 1 pA resolution. All the loggers were deployed at the beginning of May, the start of the main dust devil season, and retrieved in mid-June, with the intent of avoiding monsoon rains.

It was found upon recovery that one of the LED-based sensors had become waterlogged, apparently by a rain event in early May, and no useable data were retrieved. The low sensitivity device operated as intended, but had inadequate sensitivity to detect electrical signatures associated with dust devils.

Although one wide-range LED unit did record a vortex encounter with a strong electrical signal (figure 6), the data from this unit was generally rather noisy and few coherent vortices were detected.

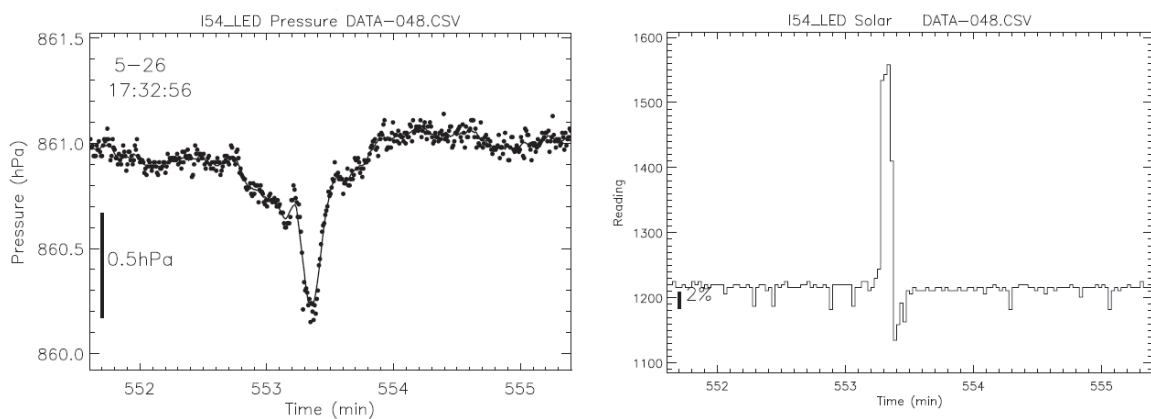


Figure 6. Dust devil encounter recorded by one of the LED-equipped units. (Left) pressure history over 4 minutes during the afternoon of 26th May 2016, with a sharp dip of ~ 0.7 hPa (0.7 mbar) corresponding to a close passage of a dust devil vortex (the larger irregular dip may be due to a cycloidal migration path giving a complex distance history – e.g. Lorenz, 2013). (Right) a large electrical disturbance is seen coincident with the close passage of the devil : from the I-V characteristics of near-IR diodes (Acharaya and Aggarwal 1996) the ~ 320 mV signal is estimated to correspond to a current of the order of 1 nA.

The high sensitivity linear unit (in fact, employing the rather simple circuit of figure 6) appears to have functioned as intended, and recorded many dust devil encounters with clear electrical signatures.

Results from this device are discussed in the remainder of this paper.

3. Results

The pressure record was used to identify close vortex passages, following the methodology of Lorenz and Jackson (2015), namely through a 6-s average reading being lower than the mean of the 30s before and after by 0.2 mbar. This algorithm fails to detect very brief pressure dips (due to very small and/or rapidly-advected vortices) and very long duration events, but maintains a low rate of false detections.

It is seen (figure 7) that a typical electrical signature is a positive voltage excursion of a couple of seconds (corresponding to a negative current, since the amplifier is in an inverting configuration), followed by an instantaneous swing to negative and then recovery back to zero. This is consistent with the base of dust devils having a generally negative space charge. Thus as the dust devil approaches, a positive current is induced, switching to a negative current as the dust devil makes closest approach and recedes. Only in a few instances (e.g. figure 8) was this pattern not seen, possibly because the event was so brief that the 1-s sampling interval failed to capture the approach phase.

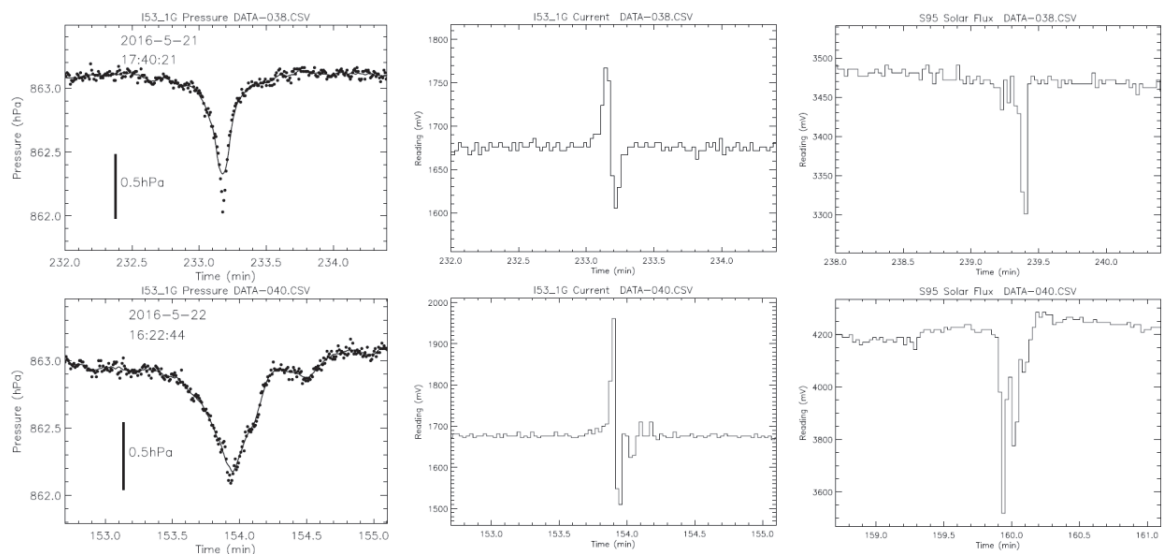


Figure 7. Two example encounters on 21 and 22 May respectively. The columns are (left to right) the pressure recorded at the high sensitivity station, the voltage on the current monitor (the values correspond to the current in pA (offset by 50% of the supply voltage, or ~1670 mV), and the short circuit current of a solar cell on a nearby logger, illustrating the obscuration of sunlight by the dust plume associated with the vortex (note that the periods shown are the same for each set of three plots : the timebase of the solar cell is offset by 6 minutes : synchronization was checked by matching the pressure record at the solar cell with that on the current meter). The 'heartbeat' shape of the current curve, and the correlations of this event with the vortex pressure signal and the dust obscuration, are evident.

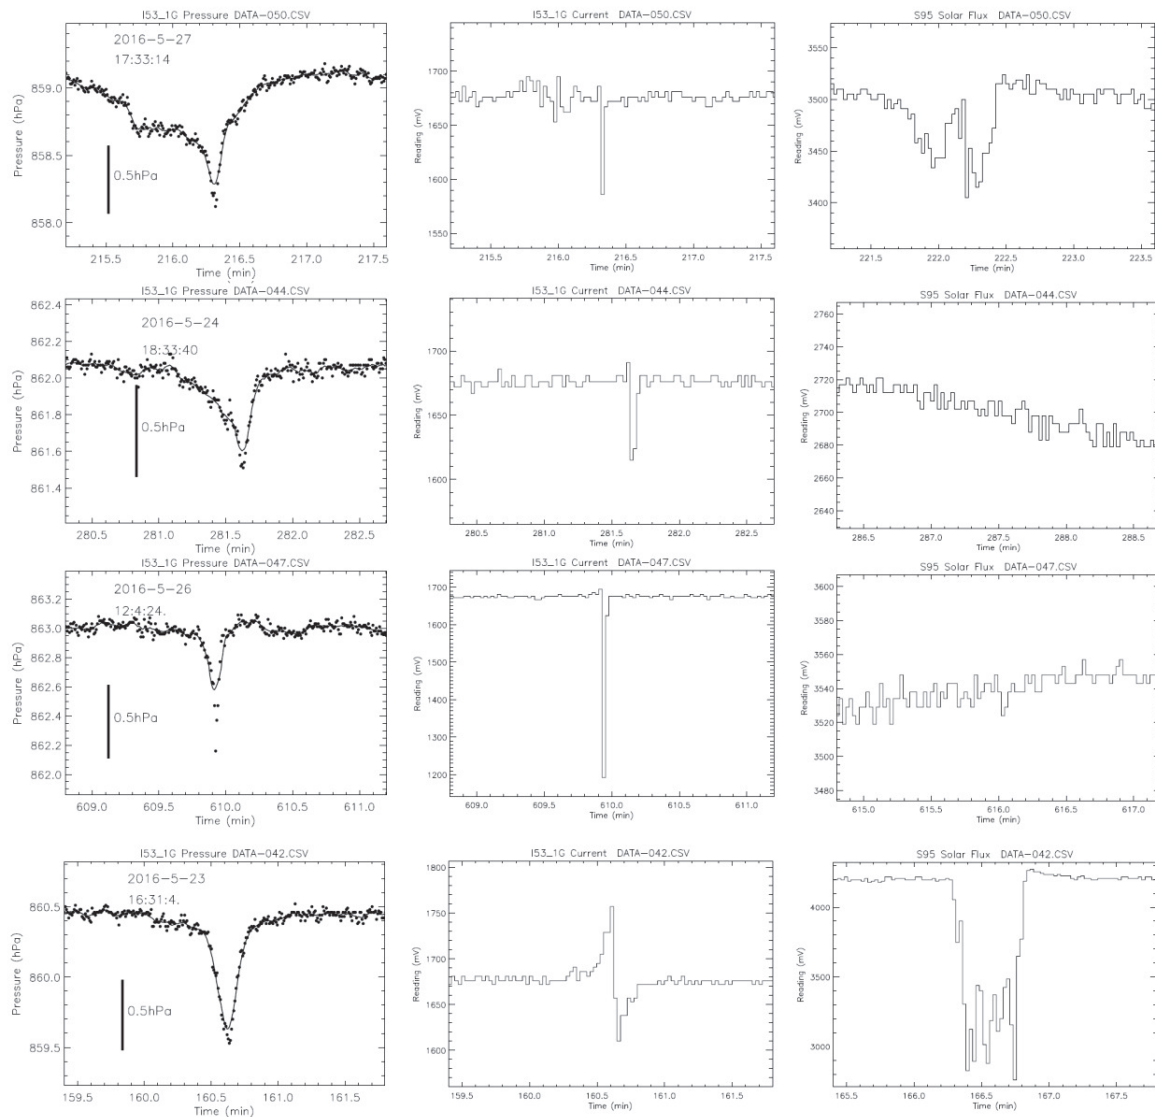


Figure 8. Further example encounters, as figure 7. Top, the same event detected by the wide-range LED unit (figure 6) in this case recorded by the nearby $1\text{G}\Omega$ high sensitivity sensor. Only a brief main current excursion is seen, although with some irregular precursors. The solar record (right, again the difference in numeric timebase is not significant) indicates either multiple encounters with a meandering devil (Lorenz, 2013), or possibly a multi-core vortex or the two walls in a diametric encounter (Lorenz and Jackson, 2015). Lines 2 and 3 show brief, single-sided dips : there was no corresponding dust obscuration event, although this could be due to the non-colocation of the dust measurement. Bottom, again a ‘heartbeat’ signature, with the solar flux record showing a rather strong (35%) obscuration lasting some 30 seconds.

192

193 This characteristic pattern argues for a space charge in the dust plume being advected across the sensor:
194 although the logger is low on the ground such that the wire could be impacted directly by charged sand,
195 this appears not to be a significant factor in the signatures associated with vortex passage. Occasional
196 single-sample spikes of +/- 20 mV were seen that were not associated with measurable vortex passages,
197 and cannot be excluded as impacts of sand, grass or other debris. However, we note that the noise level
198 on the 1G Ω logger current channel was in any case around 10 mV (i.e. 10 pA) both day and night.

199

200 Ambient weather conditions were recorded at the nearby Jornada SCAN weather station operated by
201 the National Water and Climate Center
202 (<http://wcc.sc.egov.usda.gov/nwcc/site?sitenum=2168&state=nm>) and noted alongside the vortex
203 event parameters in table 1. Generally winds were from the south with average speeds of ~10 mph
204 (~5 m/s, typical for favorable conditions for dust devil formation) and the humidity was low.

205

206

| Event # | File | Minute | Month | Day | Hour | Min | Pressure Drop (hPa) | Current (-ve, pA) | Current (+ve, pA) | Drop in sunlight (%) | Ave Wind Direction (°) | Max Wind Speed (mph) | Ave Wind Speed (mph) | Relative Humidity (%) |
|---------|------|--------|-------|-----|------|-----|---------------------|-------------------|-------------------|----------------------|------------------------|----------------------|----------------------|-----------------------|
| 1 | 30 | 37.1 | 5 | 17 | 12 | 18 | 0.7 | -98 | 40 | 0 | 113 | 23.9 | 12.9 | 24 |
| 2 | 32 | 20.4 | 5 | 18 | 12 | 3 | 0.4 | -3 | 16 | 1 | 126 | 17.6 | 8.3 | 43 |
| 3 | 38 | 233.2 | 5 | 21 | 15 | 40 | 1.1 | -65 | 97 | 5 | 209 | 23.1 | 10.4 | 9 |
| 4 | 40 | 153.9 | 5 | 22 | 14 | 23 | 0.9 | -160 | 291 | 13 | 227 | 27.4 | 14.5 | 11 |
| 5 | 42 | 160.6 | 5 | 23 | 14 | 31 | 1 | -60 | 87 | 33 | 225 | 26 | 13.5 | 10 |
| 6 | 44 | 281.5 | 5 | 24 | 16 | 34 | 0.6 | -55 | 21 | 0 | 222 | 25.1 | 15.5 | 8 |
| 7 | 47 | 610 | 5 | 26 | 10 | 4 | 0.8 | -478 | 25 | 0 | 229 | 27.2 | 15.6 | 15 |
| 8 | 50 | 216.4 | 5 | 27 | 15 | 33 | 0.9 | -84 | 25 | 3 | 232 | 21.4 | 9.7 | 9 |
| 9 | 52 | 102.5 | 5 | 28 | 13 | 41 | 0.5 | -3 | 16 | 1 | 196 | 25.3 | 13.5 | 8 |
| 10 | 52 | 232.2 | 5 | 28 | 15 | 51 | 0.4 | -46 | 35 | 1 | 186 | 23.9 | 11.9 | 6 |
| 11 | 52 | 306.1 | 5 | 28 | 17 | 5 | 0.5 | -3 | 11 | 2 | 177 | 18.9 | 8.4 | 6 |

207

Table 1. Events detected automatically and confirmed by manual inspection of the records, with extracted parameters. The events occurred in a two-week interval in the measurement period when conditions were favorable for dust devils. The humidity, average wind speed and direction and maximum wind for the clock hour including the event is added for reference (see text). Note that some precipitation was recorded at the weather station at 15:00 on 5/17/2016 and at 14:00 on 5/18/2016, shortly after events #1, and #2.

208

209

210

211

212

213

214 4. Discussion

215 It is seen that the electrical signature is much shorter in duration than the pressure excursion, which
 216 varies approximately as $\sim R^2/(R^2+d^2)$ where R is the dust devil half-diameter and d is the distance from
 217 the sensor to the center of the devil. (The dust devil diameter is obvious in well-formed cylindrical
 218 vortices as the 'wall' of dust, and corresponds to a pressure drop equal to half that at the vortex center.)
 219 This is not surprising, in that the spatial extent of the electrical disturbance would be expected to
 220 correspond closely to that of the dust which is typically the half-pressure radius, whereas a detectable
 221 pressure excursion typically extends several times further (to roughly where the pressure drop is a tenth
 222 of that at the core).

223 Crozier (1970) note that pulses in observed electric field were observed when the dust loading was
 224 temporarily enhanced when the devil encountered areas of enhanced dust availability and Esposito et
 225 al. (2016) document a number of dust devil encounters in Morocco, showing that in general the dust
 226 loading correlated with electric field perturbation, and the two were negatively correlated with relative
 227 humidity. Fields of thousands to tens of thousands of V/m were recorded during dust devil encounters.

228 We would expect that in general the discharge current would correlate linearly with the local electric
 229 field (e.g. Large and Pierce, 1956; Kirkman and Chalmers, 1957). Wind speed is also a significant factor in
 230 influencing the current, although different expressions for this dependence, and the dependence on the
 231 height of the point above the ground, have been proposed (e.g. Chalmers and Mapleson, 1955). It
 232 should be noted, however, that the correlation of 'fair weather' point discharge current with windspeed
 233 merely leads to an increase in the current for a given electrical field, and would not explain the change
 234 in polarity (the 'heartbeat') we observe which appears to be associated with dust devil passage
 235 specifically.

236

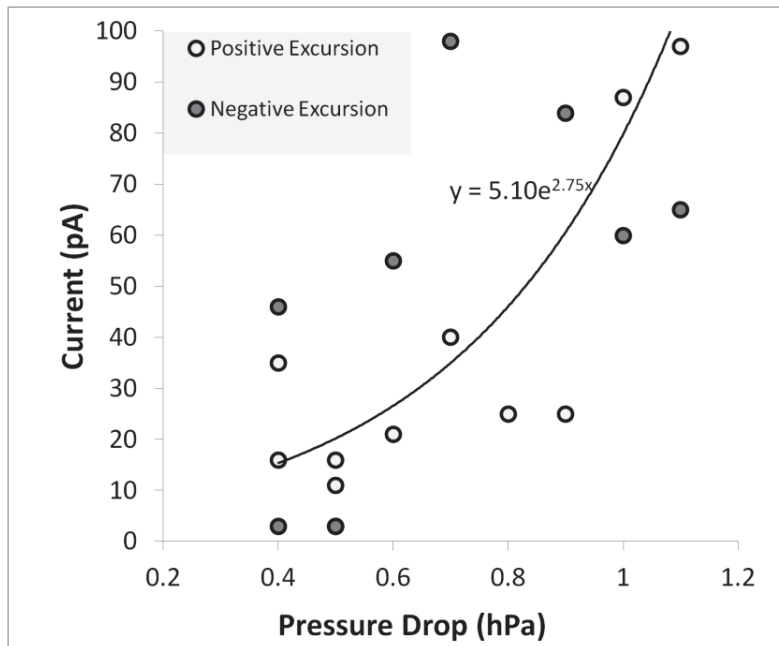


Figure 9. The maximum positive and negative discharge current is shown as a function of the core pressure drop. It is seen that both are correlated, although the data do not permit a robust discrimination of the functional dependence. An example exponential fit is shown for the positive excursion, but a linear dependence on pressure above some threshold value would also be an adequate fit. (NB the outlier, event #7, is not shown and is excluded from the fit).

Figure 9 shows the correlation of the peak negative current with the peak pressure drop. Note that the pressure drops are slightly larger than typical : a survey at this same site in June 2013 (Lorenz et al., 2015) found that 0.4mbar encounters occurred at a rate of about 30 per 100 days, while 1 mbar encounters were about ten times less frequent.

We find some correlation (figure 9) between the optical effect of the dust loading (which was not directly determined, since the solar obscuration was measured at a site offset by about 15m from the point discharge sensor) and discharge current. We may note that Esposito et al. (2016) documented a somewhat linear correlation of electric field with dust loading for encounters with a fixed relative humidity.

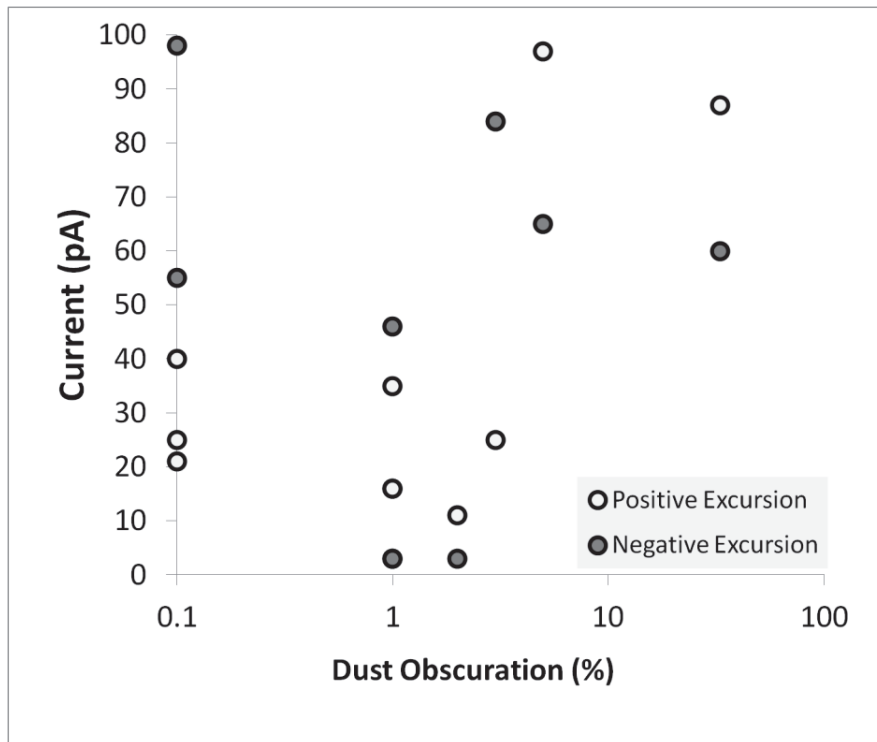


Figure 10. Correlation of peak current with dust content measured nearby. The fact that the measurements were not co-located is probably the reason for the set of points with negligible (0.1% on this logarithmic plot) dust obscuration. When dust obscuration was detected, it seems positively correlated with the current.

The observation period was about 40 days, or ~ 4 million seconds, during which 11 events were detected with electrical disturbances of some tens of picoAmps each lasting 10 seconds or so. Thus conditions were disturbed for a fraction of about 3×10^{-5} of the time (30 millionths). This is in quite good agreement with the area fraction of about 1×10^{-5} , occupied by the typical dust devil population on Earth (e.g. Lorenz and Jackson, 2016) described by a -1.6 cumulative power law in diameter between 1 and 100m in diameter. It follows that the time-averaged current from a point is $\sim 10^{-16}$ A.

The introduction of these currents to exposed conductors may have implications for the operation of unattended ground sensors for security applications. If these dust-devil-triggered currents cause spurious detections, a false alarm rate of ~ 0.25 /day during dust devil season may be expected.

5. Conclusions

Field testing has demonstrated that a very simple and compact sensor circuit can make useful measurements of dust devil electrical properties. The compact and simple electrode and amplifier configuration, presently arranged as a point discharge current meter, could be modified to measure electric fields, or could be made more sensitive to small currents. The configuration shown here gives robust indication of dust, and could be adapted to e.g. operation on an airborne platform such as an Unmanned Aerial Vehicle (UAV), and is inexpensive enough (unlike a conventional field mill) to allow its replication in large numbers, in principle permitting multiple measurements using an array of sensors. An important step in future work would be to compare the current with independent electric field measurements. One might hope in a more extended campaign to be able to resolve the vortex 'wall' where dust density is locally high.

Acknowledgements

This work was funded by NASA through the Mars Fundamental Research Program grant number NNX12AI04G. We thank Martina Klose for assistance in the field. We thank the Astronomy Department of NMSU for assistance with shipping and the NASA Planetary Data System Atmospheres Node for hosting dust devil data. Additional support was provided by Jornada Basin LTER (supported by National Science Foundation Grant DEB-1235828). KAN acknowledges a NERC Independent Research Fellowship (NE/L011514/1).

294

295

296 References

- 297 Acharya, Y.B. and Aggarwal, A.K., 1996. Logarithmic current electrometer using light emitting
298 diodes. *Measurement Science and Technology*, 7(2), 151-156
- 299 Atreya, S. K.; A.-S. Wong, N. O. Renno, W. Farrell, G. Delory, D. Sentman, S. Cummer, J.
300 Marshall, S. C. Rafkin, D. C. Catling,; 2006. Oxidant Enhancement in Martian Dust Devils and
301 Storms: Implications for Life and Habitability, *Astrobiology*, Volume 6, Issue 3, pp. 439-450.
- 302 Baddeley, P. F. H. (1860), *Whirlwinds and Dust Storms of India*, Bell and Daldey, London.
- 303 Balme, M. and R. Greeley, 2006. Dust Devils on Earth and Mars, *Reviews of Geophysics*, 44,
304 RG3003
- 305 Barth, E.L., Farrell, W.M. and Rafkin, S.C., 2016. Electric field generation in Martian dust devils.
306 *Icarus*, 268, pp.253-265.
- 307 Chalmers, J. A. and W. W. Mapleson, 1955. Point-discharge currents from a captive balloon, J.
308 *Atmospheric Terrestrial Physics*, 6, 149=159
- 309 Crozier, W.D., 1964. The electric field of a New Mexico dust devil. *Journal of Geophysical*
310 *Research*, 69(24), 5427-5429.
- 311 Delory, G. T., W.M. Farrell, S.K. Atreya, N.O. Renno, A.-S. Wong, S.A. Cummer, D.O. Sentman,
312 J.B. Marshall, S.C.R. Rafkin, D.C. Catling, 2006. Oxidant Enhancement in Martian Dust Devils and
313 Storms: Storm Electric Fields and Electron Dissociative Attachment, *Astrobiology*, Volume 6,
314 Issue 3, pp. 451-462.
- 315 Ellehoj, M. D. , H. P. Gunnlaugsson, P. A. Taylor, H. Kahanpää, K. M. Bean, B. A. Cantor, B. T.
316 Gheynani, L. Drube, D. Fisher, A.-M. Harri, C. Holstein-Rathlou, M. T. Lemmon, M. B. Madsen,
317 M. C. Malin, J. Polkko, P. H. Smith, L. K. Tamppari, W. Weng, and J. Whiteway, Convective
318 vortices and dust devils at the Phoenix Mars mission landing site, *Journal of Geophysical*
319 *Research*, 115, E00E16, 2010

- 320 Esposito, F., Debei, S., Bettanini, C., Molfese, C., Arruego Rodriguez, I., Colombatti, G., Harri,
 321 A.M., Montmessin, F., Wilson, C., Aboudan, A. and Abbaki, S., 2014. The DREAMS Experiment of
 322 the ExoMars 2016 Mission for the study of Martian environment during the dust storm Season.
 323 LPI Contributions, 1791, p.1246.
- 324 Esposito, F., Molinaro, R., Popa, C.I., Molfese, C., Cozzolino, F., Marty, L., Taj-Eddine, K., Di
 325 Achille, G., Franzese, G., Silvestro, S. and Ori, G.G., 2016. The role of the atmospheric electric
 326 field in the dust-lifting process. *Geophysical Research Letters*. 43, 5501–5508,
 327 doi:10.1002/2016GL068463
- 328
- 329 Farrell, W. M. et al. (2003) "A simple electrodynamic model of a dust devil" *Geophysical*
 330 *Research Letters* 30, 2050.
- 331
- 332 Farrell, W. M. et al. (2006) "A model of the ULF magnetic and electric field generated from a
 333 dust devil" *Journal of Geophysical Research* 111, E11004
- 334
- 335 Harrison, R.G., Barth, E., Esposito, F., Merrison, J., Montmessin, F., Aplin, K.L., Borlina, C.,
 336 Berthelier, J.J., Déprez, G., Farrell, W.M. and Houghton, I.M.P., 2016. Applications of electrified
 337 dust and dust devil electrodynamics to Martian atmospheric electricity. *Space Science Reviews*,
 338 pp.1-47.
- 339 Kirkman, J.R. and Chalmers, J.A., 1957. Point discharge from an isolated point. *Journal of*
 340 *Atmospheric and Terrestrial Physics*, 10(5-6), 258-265.
- 341 Kok, J. F. and Renno, N. O. (2009) "Electrification of windblown sand on Mars and its
 342 implications for atmospheric chemistry" *Geophysical Research Letters* 36, L05202.

- 343 Large, M.I. and Pierce, E.T., 1957. The dependence of point-discharge currents on wind as
 344 examined by a new experimental approach. *Journal of Atmospheric and Terrestrial Physics*,
 345 10(5-6), 251-257.
- 346
- 347 Lorenz, R. D., 2012. Observing Desert Dust Devils with a Pressure Logger, *Geoscientific*
 348 *Instrumentation, Methods and Data Systems*, 1, 209–220
- 349
- 350 Lorenz, R. D., 2013. Irregular Dust Devil Pressure Drops on Earth and Mars: Effect of Cycloidal
 351 Tracks, *Planetary and Space Science*, 76, 96–103, 2013
- 352
- 353 Lorenz, R. D., 2016. Heuristic Estimation of Dust Devil Vortex Parameters and Trajectories from
 354 Single-Station Meteorological Data: Application to InSight at Mars, *Icarus*, 271, 326-337
- 355
- 356 Lorenz, R. D. and B. K. Jackson, 2015. Dust Devils and Dustless Vortices on a Desert Playa
 357 Observed with Surface Pressure and Solar Flux Logging, *GeoResJ*, 5, 1-11
- 358
- 359 Lorenz, R. D. and B. K. Jackson, 2016. Dust Devil Populations and Statistics, *Space Science*
 360 *Reviews*, in press
- 361
- 362 Lorenz, R.D., Neakrase, L.D. and Anderson, J.D., 2015. In-situ measurement of dust devil activity
 363 at La Jornada Experimental Range, New Mexico, USA. *Aeolian Research*, 19, 183-194.
- 364
- 365 Lorenz, R. D., M. R. Balme, Z. Gu,, H. Kahanpää, M. Klose, M. Kurgansky, M. R. Patel, D. Reiss, A.
 366 P. Rossi, A. Spiga, T. Takemi, W. Wei. 2016. History and Applications of Dust Devil Studies, *Space*
 367 *Science Reviews*, in press doi:10.1007/s11214-016-0239-2
- 368
- 369 Marlton, G., R. G. Harrison and K. Nicoll, 2013. Note: Atmospheric point discharge current
 370 measurements using a temperature-compensated logarithmic current amplifier, *Review of*
 371 *Scientific Instrumentss*, 84, 066103

372

373 Nicoll, K. A., R. G. Harrison and Z. Ulanowski, Observations of Saharan dust layer
374 Electrification, Environment Research Letters, 6, /014001, 2011. doi:10.1088/1748-
375 9326/6/1/014001

376

377 Snow, J. T. and T. McClelland, Dust devils at White Sands Missile Range, New Mexico 1.
378 Temporal and Spatial Distributions, 1990. J. Geophysical Research, 95, 13,707-13,721